# Civik Zink/technical data sheet

Civik Zink staircases are characterized by a landing which allows the staircases to be fitted to openings without a hole or with a square opening.

Civik Zink has an adjustable height between 252 and 305 cm.

STEEL COLOURS

HOT-DIP GALVANIZING

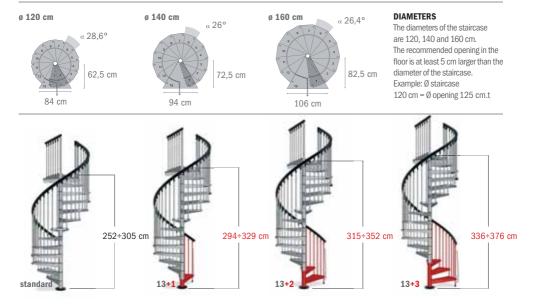


Table 1			SUPPLEMENTARY ITEMS	
INCREASE	STAIRCASE HEIGHT IN CM	RISES	TREADS	POLES
	from 336 to 376	16	+ 3	+ 1
	from 315 to 352	15	+ 2	+ 2*
	from 294 to 329	14	+ 1	-
STANDARD	from 273 to 305	13	12 GALVANISED TREADS + 1 GALVANISED LANDING + RAILING WITH VERTICAL BALUSTERS	
DECREASE	from 252 to 282	12	-	-
	from 231 to 258	11	-	+ 1*
	from 210 to 235	10	-	+ 1*




RISE ADJUSTABLE FROM 21 TO 23.5 CM

\* REPLACES THE EXISTING 125 CM POLE IN THE CIVIK ZINK STAIRCASE



# SUPPLEMENTARY ITEMS OVERVIEW TREAD RISER POLE (82 CM) BALUSTRADE (120 CM)

### TYPES OF OPENINGS AND BALUSTRADES



square opening



### ROTATION

The direction of rotation, whether clockwise or anti-clockwise, can be decided during installation.







fig. 2

anti-clockwise

### SUPPLEMENTARY BALUSTRADE

It is necessary to protect the upper floor aperture (fig. 1, 2). It comes in 120 cm modules comprising 10 balusters, handrail and fixings.

## SUPPLEMENTARY TREADS / POLES

To reach a staircase height of 376 cm, you must purchase one or more supplementary treads comprising the structure, tread and balusters. Supplementary pole modules (Table 1) must be purchased for certain configurations.

### RISER BAR

Allows to reduce the space between treads to prevent children from falling.



# RESISTANCE TO WEATHERING



### **EXAMPLE**

If you wish to purchase CIVIK ZINK comprising 13 + 3 = 16 rises (see adjacent drawing), the following items are needed:

- 1 CIVIK ZINK STAIRCASE (standard)
- **3 SUPPLEMENTARY TREADS**
- 1 SUPPLEMENTARY POLE (82 cm)



FOR FURTHER INFORMATION
VISIT THE WEBSITE
www.fontanotstaircases.co.uk

